


## OVERVIEW

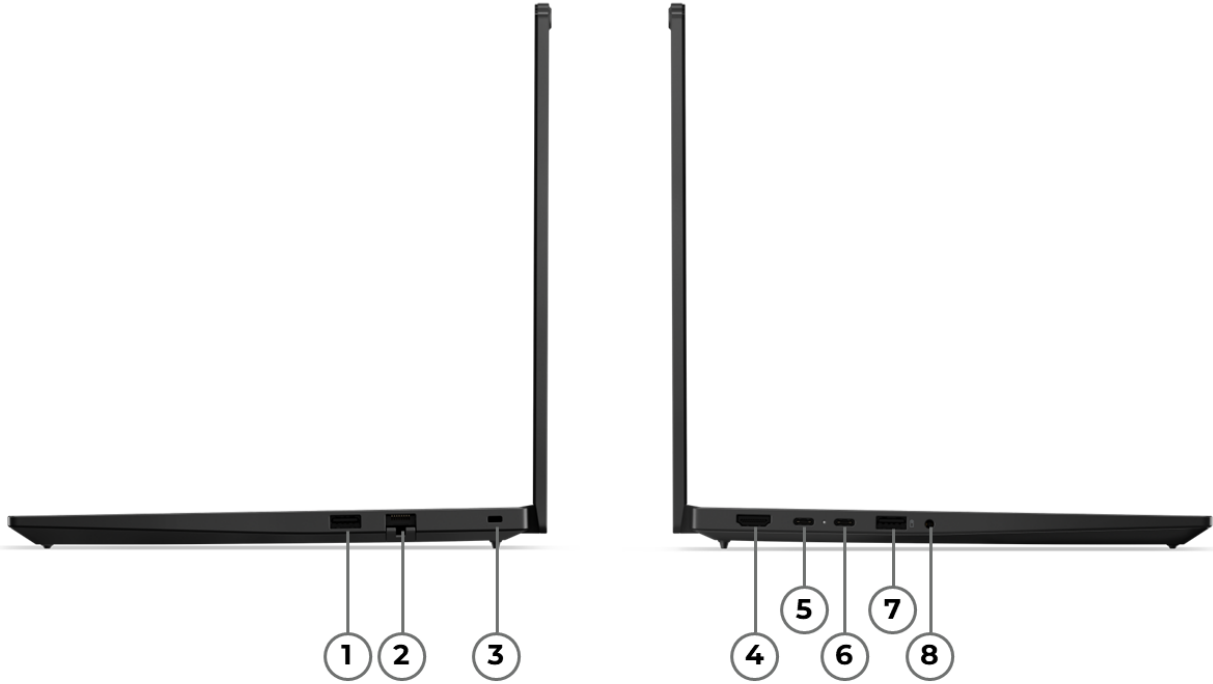

1. USB-A (USB 5Gbps)	5. USB-C (USB 5Gbps), with USB PD 3.1 & DP 1.4
2. Ethernet (RJ-45)	6. USB-C (USB4 40Gbps), with PD 3.1 & DP 1.4a
3. Kensington Nano Security Slot	7. USB-A (USB 10Gbps), Always On
4. HDMI	8. Headphone / microphone combo jack (3.5mm)

## PERFORMANCE

### Processor

#### Processor Family

- AMD Ryzen™ 3 / 5 / 7 200 Series Processor
- AMD Ryzen™ 5 PRO 200 Series Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU	Overall TOPS
AMD Ryzen™ 3 210	4	8	3.0GHz	4.7GHz	4MB L2 / 8MB L3	AMD Radeon™ 740M	-	-
AMD Ryzen™ 5 220	6	12	3.2GHz	4.9GHz	6MB L2 / 16MB L3	AMD Radeon™ 740M	-	-
AMD Ryzen™ 5 230	6	12	3.5GHz	4.9GHz	6MB L2 / 16MB L3	AMD Radeon™ 760M	AMD Ryzen™ AI, up to 16 TOPS	Up to 31 TOPS
AMD Ryzen™ 5 PRO 215 <sup>[1]</sup>	6	12	3.2GHz	4.7GHz	6MB L2 / 16MB L3	AMD Radeon™ 740M	-	-
AMD Ryzen™ 7 250	8	16	3.3GHz	5.1GHz	8MB L2 / 16MB L3	AMD Radeon™ 780M	AMD Ryzen™ AI, up to 16 TOPS	Up to 38 TOPS

Notes:

[1] AMD Ryzen™ 5 PRO 215 is for special bid only.

### AI (Artificial Intelligence)

#### AI PC Category<sup>[1]</sup>

AI PC<sup>[2]</sup>

#### NPU

Integrated AMD Ryzen™ AI, up to 16 TOPS<sup>[3]</sup>

Notes:

[1] AI PC is only available for the models with AMD Ryzen™ 5 230 or AMD Ryzen™ 7 250 processor.

[2] AI PCs have a NPU capable of 10+ TOPs to run the Copilot assistant by pressing the optional Microsoft® Copilot key or using Win + C.

[3] Only for the models with AMD Ryzen™ 5 230 or AMD Ryzen™ 7 250 processor.

### Operating System

#### Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- No preload operating system

### Graphics

#### Graphics\*\*

Graphics	Type	Memory	TGP	Key Features
AMD Radeon™ 740M	Integrated	Shared	Share CPU TDP	DirectX® 12
AMD Radeon™ 760M	Integrated	Shared	Share CPU TDP	DirectX® 12
AMD Radeon™ 780M	Integrated	Shared	Share CPU TDP	DirectX® 12

### Monitor Support

#### Monitor Support<sup>[1]</sup>

Supports up to 4 independent displays (native display and 3 external monitors via HDMI®, USB-C® and USB4®)

- HDMI® supports up to 4096x2160@60Hz
- USB-C® supports up to 4096x2160@60Hz

- USB4® supports up to 7680x4320@60Hz<sup>[2]</sup>

#### Notes:

[1] Refresh rates >60hz also supported, however max resolution will be limited.

[2] 8K resolution support needs 2 display pipes. That is, simultaneous display number will “-1” when 8K resolution displayed.

## Chipset

### Chipset

AMD SoC (System on Chip) platform

## Memory

### Max Memory

Up to 64GB DDR5-5600<sup>[1]</sup>

### Memory Slots

Two DDR5 SO-DIMM slots, dual-channel capable

### Memory Type

DDR5-5600

#### Notes:

[1] The 64GB memory is exclusively available for special bid only.

## Storage

### Max Storage Support

Up to two drives, 2x M.2 SSD

- M.2 2242 SSD up to 1TB
- M.2 2280 SSD up to 1TB<sup>[1]</sup>

### Storage Slot<sup>[2]</sup>

Two M.2 slots

- One M.2 2242 PCIe® 4.0 x4 slot
- One M.2 2280 PCIe® 4.0 x4 slot

### Storage Type

Disk Type	Interface	Offering	Security
M.2 2242 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB	Opal 2.0

#### Notes:

[1] The system supports dual SSD via two M.2 slots, but Lenovo® only offers one M.2 2242 SSD configuration and M.2 2280 slot for user self-extension.

[2] The actual data transfer rate of the following PCIe® interface also depends on the capabilities of the connected PCIe® device. The listed values represent theoretical maximums.

PCIe® 3.0 (x2 / x4): 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps);

PCIe® 4.0 (x2 / x4): 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps);

PCIe® 5.0 (x2 / x4): 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps).

## Removable Storage

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Senary SN6147 codec

### Speakers

Stereo speakers, 2W x2, Dolby Atmos®, audio by HARMAN

### Microphone

Dual-microphone array, 360° far-field, smart noise-cancelling

**Camera\*\***

- HD 720p, with privacy shutter, fixed focus
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus, temporal noise reduction
- 5.0MP, with privacy shutter, fixed focus, temporal noise reduction

**Battery****Battery\*\***

- 48Wh Rechargeable Li-ion Battery, supports Rapid Charge Pro (charge up to 50% in 30min)<sup>[1]</sup>
- 64Wh Rechargeable Li-ion Battery

**Battery Life<sup>[2]</sup>**

Configuration 1 (max battery life)

MobileMark® 30: up to 11.38 hr with 857 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 11.6 hr / 20.35 hr @200nits

Local video playback: up to 18.35 hr @150nits

Configuration 2

MobileMark® 30: up to 10.15 hr with 836 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 10.21 hr / 18.1 hr @200nits

Local video playback: up to 16.26 hr @150nits

Configuration 3

MobileMark® 30: up to 8.71 hr with 838 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 8.55 hr / 15.51 hr @200nits

Local video playback: up to 13.66 hr @150nits

Notes:

[1] Rapid charge is only guaranteed when the computer is turned off or in standby mode or in hibernation mode. When the computer is powered on, the Charge Time will vary depending on system power consumption and AC adapter power.

[2] Configuration 1: WUXGA (non-touch), AMD Ryzen™ 7 250, 16GB DDR5, Win 11, 64Wh battery, best power efficiency power mode

Configuration 2: WUXGA (non-touch), AMD Ryzen™ 5 230, 32GB DDR5, Win 11, 64Wh battery, best power efficiency power mode

Configuration 3: WUXGA (non-touch), AMD Ryzen™ 7 250, 16GB DDR5, Win 11, 48Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark® 30](#), JEITA 3.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary and depends on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.

Refer to [Microsoft® link](#) for more information about the Windows® Performance power slider.

**Power Adapter****Power Adapter\*\*<sup>[1]</sup>**

- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim (2-pin, wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter<sup>[2]</sup>

Notes:

[1] AC adapter offerings depend on the country.

[2] No power adapter is for special bid only.

**DESIGN****Display****Display\*\***

Size	Resolution	Touch	Type	Brightness	Surface	Aspect	Contrast	Color	Refresh	Viewing	Key Features
------	------------	-------	------	------------	---------	--------	----------	-------	---------	---------	--------------

						Ratio	Ratio	Gamut	Rate	Angle (L/R/U/D)	
14"	WUXGA (1920x1200)	Non-touch	IPS <sup>[1]</sup>	300nits	Anti-glare	16:10	1000:1	45% NTSC	60Hz	89° / 89° / 89° / 89°	TÜV Low Blue Light (Software)
14"	WUXGA (1920x1200)	Multi-touch	IPS <sup>[2]</sup>	300nits	Anti-glare	16:10	1000:1	45% NTSC	60Hz	89° / 89° / 89° / 89°	TÜV Low Blue Light (Software)
14"	WUXGA (1920x1200)	Non-touch	IPS <sup>[3]</sup>	300nits	Anti-glare	16:10	1000:1	100% sRGB	60Hz	89° / 89° / 89° / 89°	Eyesafe® Certified 2.0

**Touchscreen**

- Add-on Film Touch, supports 10-point touch
- Non-touch

**Screen-to-Body Ratio**

90%

Notes:

[1], [2], [3] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

**Input Device****Pen**

No support

**Keyboard**

6-row, spill-resistant, multimedia Fn keys, key travel 1.5mm / 1.35mm (Fn row &amp; G/H/B), Copilot key

**Keyboard Backlight**

- LED backlight
- Non-backlight

**UltraNav™**TrackPoint® pointing device, double-tap to open the TrackPoint® Quick Menu  
Mylar® surface multi-touch 3-button Trackpad, 60 x 115 mm (2.36 x 4.53 inches)**Mechanical****Dimensions (WxDxH)<sup>[1]</sup>**

Models	Dimensions
Models with aluminium (top) and PC-ABS (bottom)	313 x 220.3 x 10.1/15.25 (front/rear), 20.5 (maximum) mm; 12.32 x 8.67 x 0.40/0.60 (front/rear), 0.81 (maximum) inches
Models with aluminium (top) and aluminium (bottom)	313 x 220.3 x 10.1/15.25 (front/rear), 19.7 (maximum) mm; 12.32 x 8.67 x 0.40/0.60 (front/rear), 0.78 (maximum) inches

**Weight<sup>[2]</sup>**

Starting at 1.41 kg (3.11 lbs)

**Case Color\*\***

- Black
- Grey<sup>[3]</sup>

**Case Material\*\***

- Aluminium (top), PC-ABS (bottom)
- Aluminium (top), aluminium (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[3] Grey color is for special bid only.

## CONNECTIVITY

### Network

#### WLAN + Bluetooth®\*\*<sup>[1]</sup>

- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card<sup>[2]</sup>
- MediaTek Wi-Fi® 6 MT7920, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card<sup>[3]</sup>
- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card<sup>[4]</sup>
- Wi-Fi® 6E, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card<sup>[5]</sup>
- Realtek® Wi-Fi® 6E RTL8852CE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card<sup>[6]</sup>
- AMD Wi-Fi® 6E RZ616, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card<sup>[7]</sup>
- Wi-Fi® 7, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, M.2 card<sup>[8]</sup>
- MediaTek Wi-Fi® 7 MT7925, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, M.2 card<sup>[9]</sup>
- Realtek® Wi-Fi® 7 RTL8922AE, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4, M.2 card<sup>[10]</sup>

#### WWAN

No support

#### SIM Card

No physical SIM card inbox

#### Ethernet

Gigabit Ethernet, Realtek® RTL8111H-CG, 1x RJ-45, supports Wake-on-LAN

#### NFC

No support

Notes:

[1] Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

[2], [3], [4] Wi-Fi® 6 operation is subject to the regulation rules in each country.

[5], [6], [7] Wi-Fi® 6E operation is subject to the regulation rules in each country.

[8], [9], [10] Wi-Fi® 7 operation is subject to the regulation rules in each country.

### Ports<sup>[1]</sup>

#### Standard Ports

- 1x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 1x USB-A (USB 10Gbps / USB 3.2 Gen 2), Always On
- 1x USB-C® (USB 5Gbps / USB 3.2 Gen 1), with USB PD 3.1 and DisplayPort™ 1.4
- 1x USB-C® (USB4® 40Gbps), with USB PD 3.1 and DisplayPort™ 1.4a
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Ethernet (RJ-45)

Notes:

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

### Docking

#### Docking

Various docking solutions supported via USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® E14 Gen 7 \(AMD\)](#)

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0 (TCG certified, FIPS 140-2 certified) and Microsoft® Pluton TPM 2.0, one enabled at one time

#### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

**Smart Card Reader**

No smart card reader

**Fingerprint Reader**

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

**BIOS Security**

- NVMe® password
- Power-on password
- Supervisor password
- System management password
- Certificate-based BIOS authentication
- FIDO (Fast Identity Online) authentication
- Self-healing BIOS
- More BIOS security features, please visit [BIOS Simulator<sup>\[1\]</sup>](#)

**Other Security**

- Camera privacy shutter
- (Optional) IR camera for Windows® Hello (facial recognition)
- ThinkShield

---

Notes:

[1] The BIOS simulator is just for reference. Default settings and some options may vary depending on the hardware, operating system and BIOS version.

## MANAGEABILITY

### System Management

**System Management**

Non-DASH

## SERVICE

### Warranty

**Base Warranty\*\***

- 1-year mail-in service
- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- No base warranty

## ACCESSORIES

### Bundled Accessories

**Bundled Accessories<sup>[1]</sup>**

None

---

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for ThinkPad® E14 Gen 7 \(AMD\)](#).

## OPERATING REQUIREMENTS

### Operating Environment

**Temperature<sup>[1]</sup>**

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

### Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

#### Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## ENVIRONMENTAL

### Sustainability

#### Material<sup>[1]</sup>

50% recycled aluminium on top cover  
50% PCC recycled plastic used in display panel frame  
50% recycled aluminium on metal bottom cover  
50% PCC recycled plastic used in PC-ABS bottom cover  
90% PCC recycled plastic used in battery pack enclosure  
85% PCC recycled plastic used in key caps (backlight)  
70% PCC recycled plastic used in key caps (non-backlight)  
90% PCC recycled plastic used in speaker enclosure  
90% PCC recycled plastic used in standard 65W adapter  
FSC carton and accessory box  
FSC paper screen sheet  
Bamboo fiber NB bag  
Paper cushion  
Paper sealing label

#### Notes:

[1] PCC: Post Consumer Content, recycled materials from customers.

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>

- ENERGY STAR® 9.0
- EPEAT™ Gold Registered<sup>[3]</sup>
- ErP Lot 6/26
- RoHS compliant
- TCO Certified 10.0

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit [epeat.net](https://epeat.net) and [energystar.gov](https://energystar.gov) for more information.

[3] EPEAT™ is registered where applicable, please visit [epeat.net](https://epeat.net) for registration status by country.

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications

- (Optional) Eyesafe® Certified 2.0
- (Optional) TÜV Rheinland® Low Blue Light (Software Solution)

• Feature with \*\* means that only one option listed under the feature can be configured on selected models.

Please refer to the model configuration for specific information.

• Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not

responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD



AMD



AMD



AMD



AMD



AMD